

Astra Tech Implant EV Profile

Description

Screw-shaped dental implant with a defined surface roughness, achieved through grit blasting, followed by a process involving a treatment in diluted hydrofluoric acid - OsseoSpeed®. The external coronal portion has minute threading - MicroThread®. The implants have an inner geometry with a conical and indexing configuration and One-position-only placement of all indexed restorative components. One-piece healing abutments and one-piece abutments from the standard assortment can also be used. The Astra Tech Implant EV Profile has a sloped design to match a sloped bone ridge.

Different profiles, diameters and lengths of the implants are available providing versatility according to the thickness and shape of the bone.

Material

Commercially pure titanium, grade 4 according to ASTM F67.

Package and storage

Package; cardboard outer box containing a plastic blister with an titanium/plastic inner container with the implant. The blister serves as a sterile barrier. Sterilized by irradiation.

The components must be stored, in their sealed package, in a dry place, at normal room temperature i.e. 18-25 °C/64-77 °F.


Handling procedure


For detailed information see latest version of appropriate procedure manuals.





>>


Design

REF	Implants	A	B	C	D	E	F	L	M
P_{4.2} 	26371 Astra Tech Implant EV Profile 4.2 PS - 8 mm	4.25	4.2	3.6	3.3	3.7	2.0	8.0	M1.8
	26372 Astra Tech Implant EV Profile 4.2 PS - 9 mm	4.25	4.2	3.6	3.1	3.7	2.5	9.0	M1.8
	26373 Astra Tech Implant EV Profile 4.2 PS - 11 mm	4.25	4.2	3.6	3.1	3.7	2.5	11.0	M1.8
	26374 Astra Tech Implant EV Profile 4.2 PS - 13 mm	4.25	4.2	3.6	3.1	3.7	2.5	13.0	M1.8
	26375 Astra Tech Implant EV Profile 4.2 PS - 15 mm	4.25	4.2	3.6	3.1	3.7	2.5	15.0	M1.8
	26376 Astra Tech Implant EV Profile 4.2 PS - 17 mm	4.25	4.2	3.6	3.1	3.7	2.5	17.0	M1.8


P_{4.2} 	26381 Astra Tech Implant EV Profile 4.2 PC - 8 mm	4.24	3.6	3.0	2.7	4.2	2.0	8.0	M1.8
	26382 Astra Tech Implant EV Profile 4.2 PC - 9 mm	4.24	3.6	3.0	2.5	4.2	2.5	9.0	M1.8
	26383 Astra Tech Implant EV Profile 4.2 PC - 11 mm	4.24	3.6	3.0	2.5	4.2	2.5	11.0	M1.8
	26384 Astra Tech Implant EV Profile 4.2 PC - 13 mm	4.24	3.6	3.0	2.5	4.2	2.5	13.0	M1.8
	26385 Astra Tech Implant EV Profile 4.2 PC - 15 mm	4.24	3.6	3.0	2.5	4.2	2.5	15.0	M1.8
	26386 Astra Tech Implant EV Profile 4.2 PC - 17 mm	4.24	3.6	3.0	2.5	4.2	2.5	17.0	M1.8

P_{4.8} 	26401 Astra Tech Implant EV Profile 4.8 PS - 8 mm	4.85	4.8	4.2	3.9	3.7	2.0	8.0	M2
	26402 Astra Tech Implant EV Profile 4.8 PS - 9 mm	4.85	4.8	4.2	3.7	3.7	2.5	9.0	M2
	26403 Astra Tech Implant EV Profile 4.8 PS - 11 mm	4.85	4.8	4.2	3.7	3.7	2.5	11.0	M2
	26404 Astra Tech Implant EV Profile 4.8 PS - 13 mm	4.85	4.8	4.2	3.7	3.7	2.5	13.0	M2
	26405 Astra Tech Implant EV Profile 4.8 PS - 15 mm	4.85	4.8	4.2	3.7	3.7	2.5	15.0	M2
	26406 Astra Tech Implant EV Profile 4.8 PS - 17 mm	4.85	4.8	4.2	3.7	3.7	2.5	17.0	M2

P_{4.8} 	26411 Astra Tech Implant EV Profile 4.8 PC - 8 mm	4.88	4.2	3.6	3.3	4.2	2.0	8.0	M2
	26412 Astra Tech Implant EV Profile 4.8 PC - 9 mm	4.88	4.2	3.6	3.1	4.2	2.5	9.0	M2
	26413 Astra Tech Implant EV Profile 4.8 PC - 11 mm	4.88	4.2	3.6	3.1	4.2	2.5	11.0	M2
	26414 Astra Tech Implant EV Profile 4.8 PC - 13 mm	4.88	4.2	3.6	3.1	4.2	2.5	13.0	M2
	26415 Astra Tech Implant EV Profile 4.8 PC - 15 mm	4.88	4.2	3.6	3.1	4.2	2.5	15.0	M2
	26416 Astra Tech Implant EV Profile 4.8 PC - 17 mm	4.88	4.2	3.6	3.1	4.2	2.5	17.0	M2

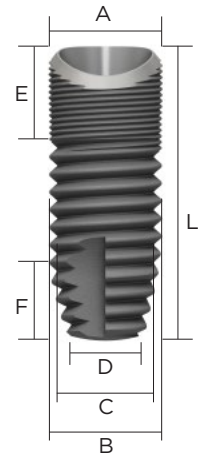

- A Cervical \varnothing
 - B Apical \varnothing 1
 - C Body core \varnothing
 - D Apical \varnothing 2
 - E Microthreaded portion
 - F Taper start point
 - L Length
 - M Internal threading
- All measurements are in mm

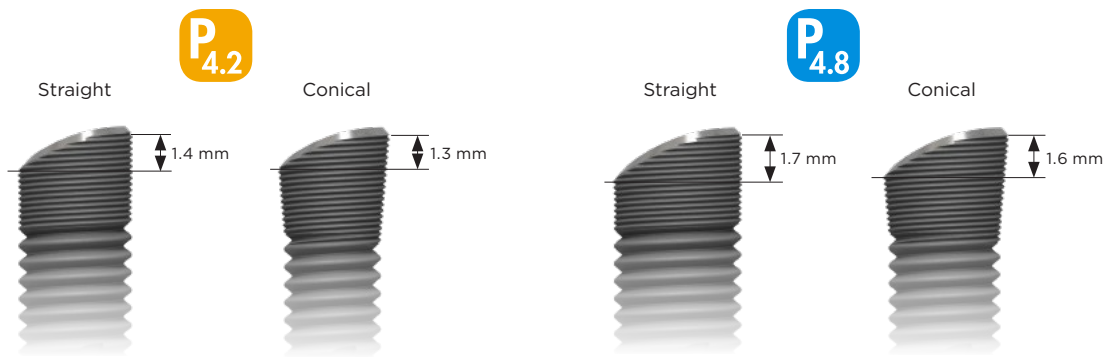

All products are subject to change without notice.
All products may not be regulatory cleared/released/licensed in all markets.